

CURRENT 2.5 Ampere
 VOLTAGE RANG 50 to 1000 Volts


FR251 THRU FR257

FEATURES

- Low coat construction
- Fast switching for high efficiency.
- Low reverse leakage
- High forward surge current capability
- High temperature soldering guaranteed:
 260 /10 secods/.375 (9.5mm)lead length at 5 lbs(2.3kg)
 tension

MECHANICAL DATA

- Case: Transfer molded plastic
- Epoxy: UL94V-O rate flame retardant
- Polarity: Color band denotes cathode end
- Lead: Plated axial lead, solderable per MIL-STD-202E
 method 208C
- Mounting position: Any
- Weight: 0.042ounce, 0.59 grams

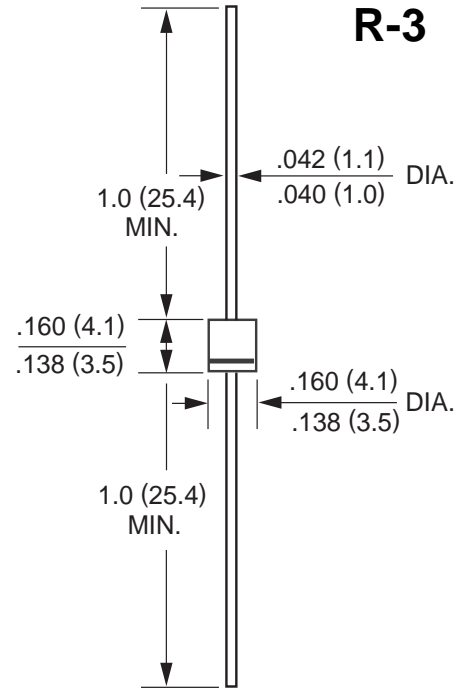

Dimensions in inches and (millimeters)

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

- Ratings at 25°C ambient temperature unless otherwise specified
- Single Phase, half wave, 60Hz, resistive or inductive load
- For capacitive load derate current by 20%

	SYMBOLS	FR 251	FR 252	FR 253	FR 254	FR 255	FR 256	FR 257	UNITS
Maximum Repetitive Peak Reverse Voltage	V_{RRM}	50	100	200	400	600	800	1000	Volts
Maximum RMS Voltage	V_{RMS}	35	70	140	280	420	560	700	Volts
Maximum DC Blocking Voltage	V_{DC}	50	100	200	400	600	800	1000	Volts
Maximum Average Forward Rectified Current 0.375 (9.5mm) lead length at $T_A=75$	$I_{(AV)}$	2.5							Amp
Peak Forward Surge Current 8.3mS single half sine wave superimposed on rated load (JEDEC method)	I_{FSM}	100							Amps
Maximum Instantaneous Forward Voltage @ 2.5A	V_F	1.3							Volts
Maximum DC Reverse Current at Rated DC Blocking Voltage	$T_A=25$	5.0							μA
	$T_A=100$	500							
Maximum Reverse Recovery Time (Note 3) $T_J=25$	t_{rr}	150			250	500		ns	
Typical Junction Capacitance (Note 1)	C_J	60							pF
Typical Thermal Resistance (Note 2)	$R_{\theta JA}$	30							/W
Operating Junction Temperature Range	T_J	(-55 to +150)							
Storage Temperature Range	T_{STG}	(-55 to +150)							




Notes:

- 1.Measured at 1.0MHz and Applied Reverse Voltage of 4.0Volits.
- 2 Thermal Resistance from junction to Ambient at .375 (9.5mm)lead length, P.C.board mounted.
- 3.Reverse Recovery Test Conditions:If=0.5mA,Ir=1.0mA,Irr=0.25A

CURRENT 2.5 Ampere
 VOLTAGE RANG 50 to 1000 Volts

FR251 THRU FR257

RATING AND CHARACTERISTIC CURVES FR251 Thru FR257

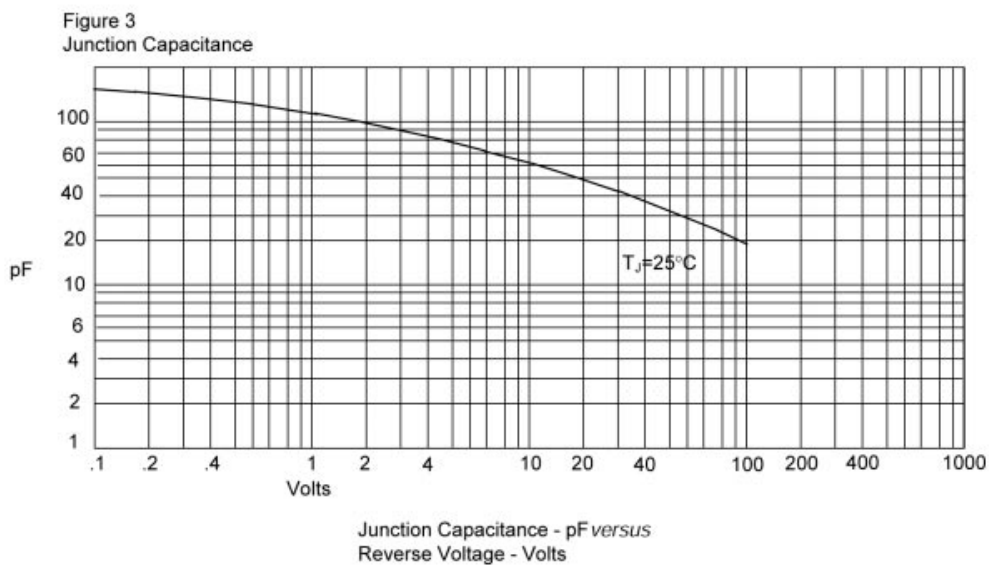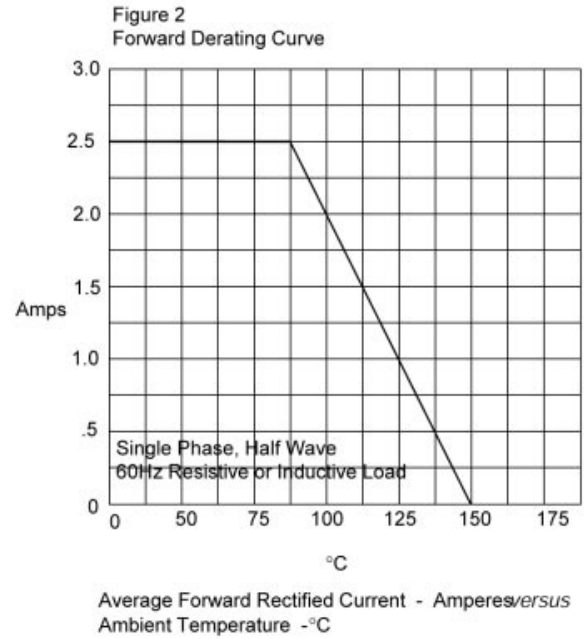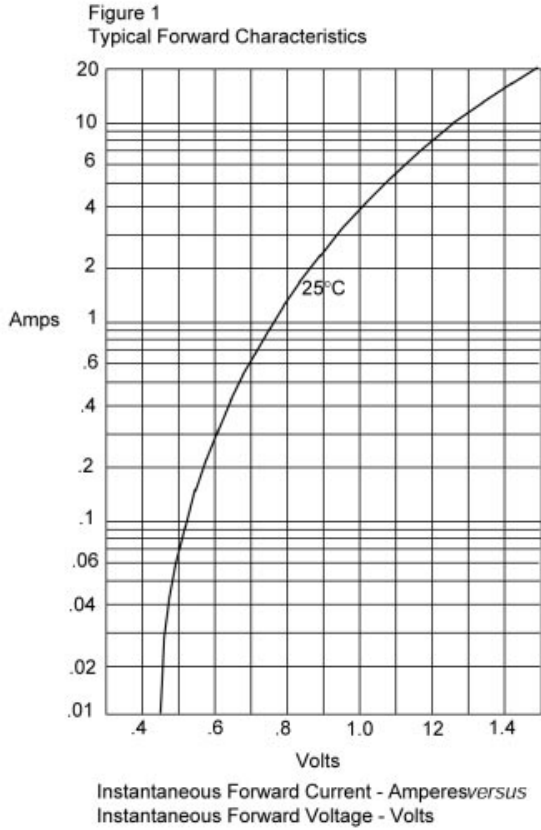

CURRENT 2.5 Ampere
 VOLTAGE RANG 50 to 1000 Volts

FR251 THRU FR257

RATING AND CHARACTERISTIC CURVES FR251 Thru FR257


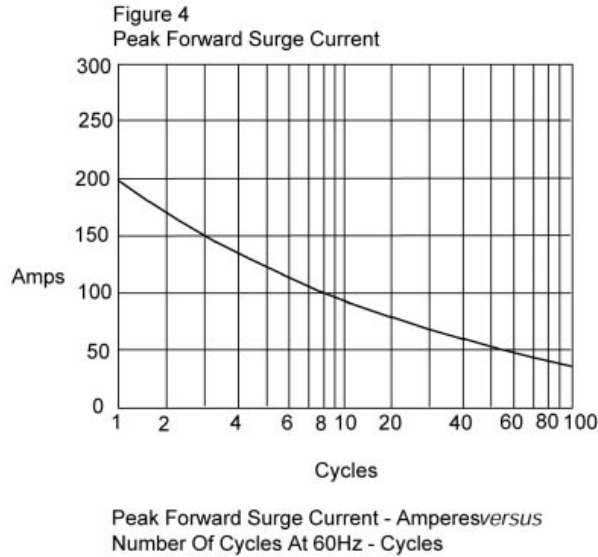


Figure 5
 Reverse Recovery Time Characteristic And Test Circuit Diagram



- Notes:
1. Rise Time = 7ns max.
 Input impedance = 1 megohm, 22pF
 2. Rise Time = 10ns max.
 Source impedance = 50 ohms
 3. Resistors are non-inductive

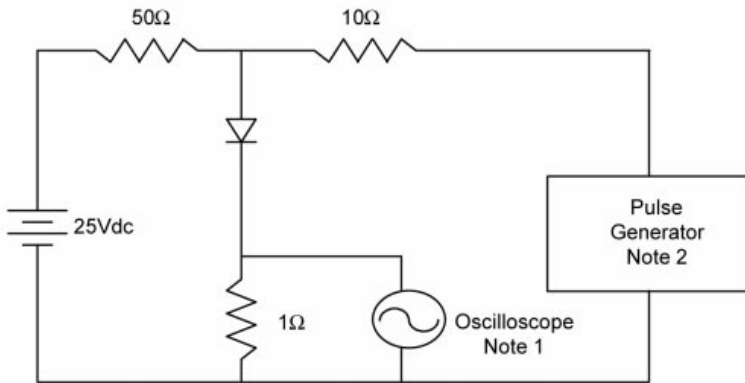